



PARS PLUS CASSETTE AWNING

Technical Information List


V 030818




General View

Retractable & Ready to Mount, with Chosen Fabric


This product comes standard as: Motorized with remote control & It can't be manual operated.

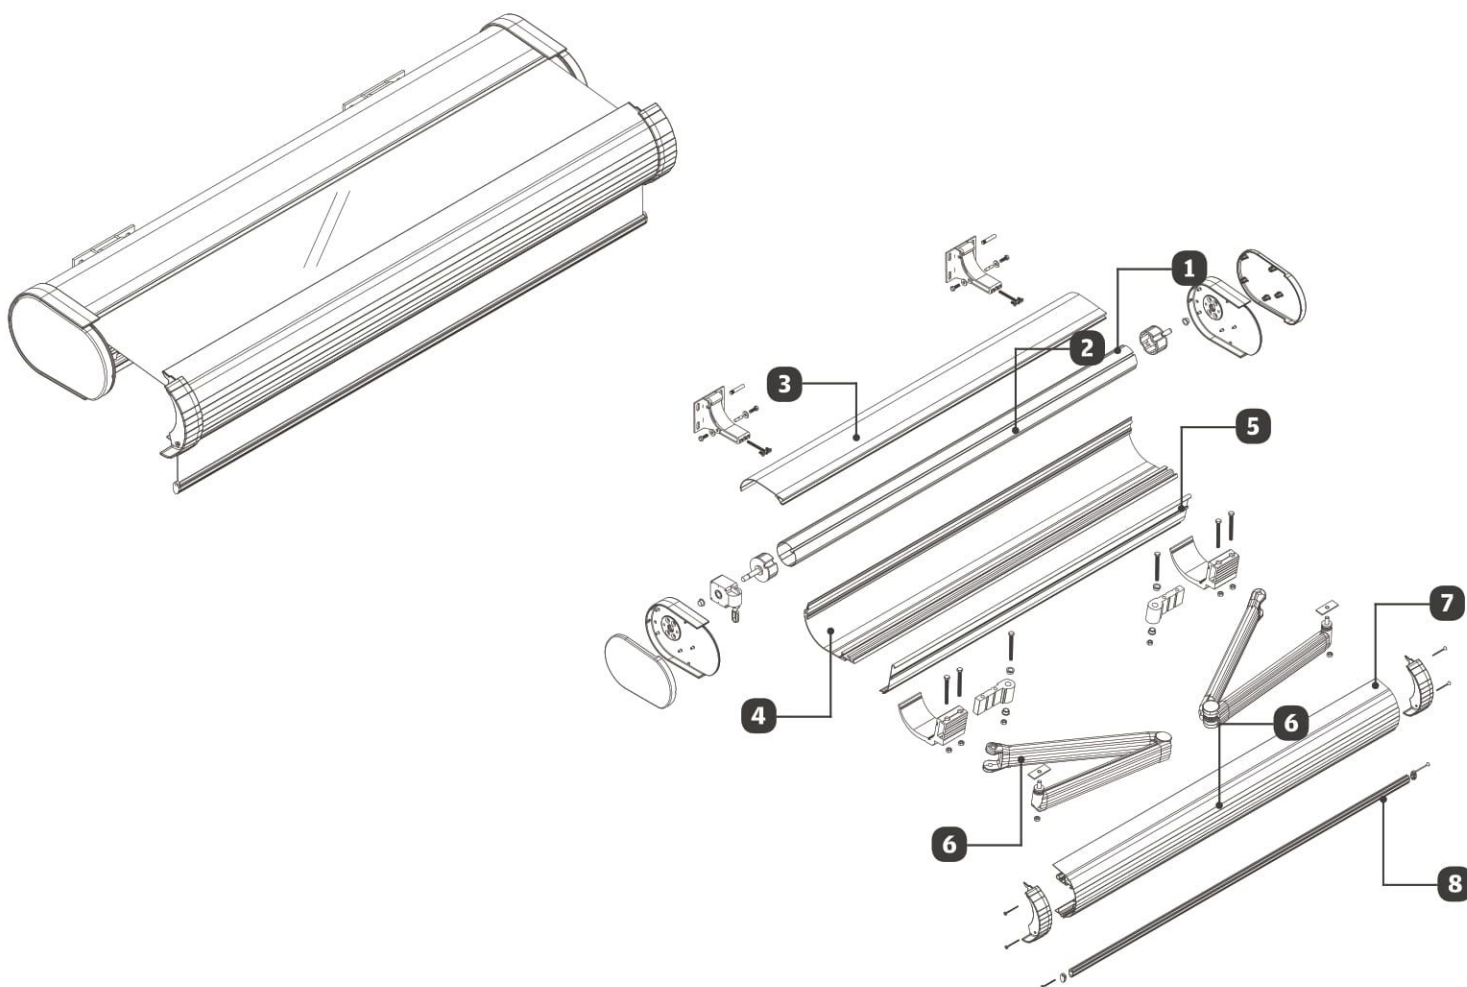


1 Roller Tube Ø70

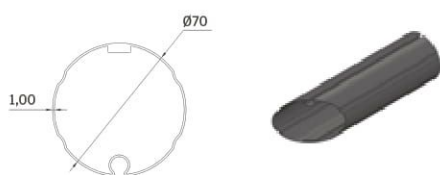


2 Roller Tube Ø78

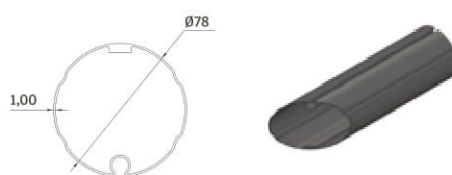

3 Upper Main Profile

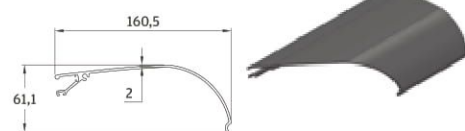


4 Lower Main Profile

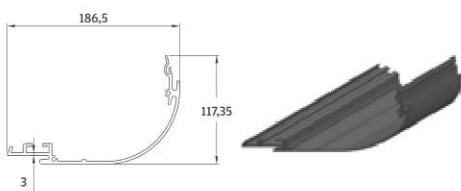


5 Fabric Protection Profile




6 Arm Profile

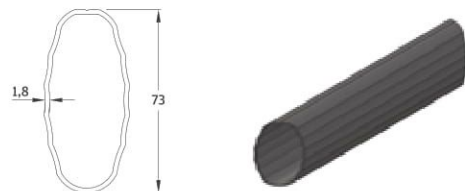



7 Front Profile

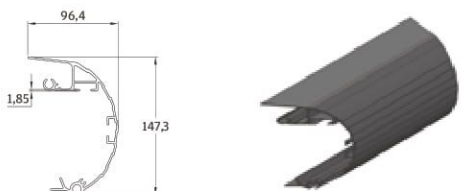


8 Valance Weight Bar

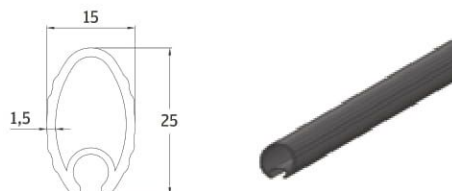

* All dimensions shown above are in milimeters.

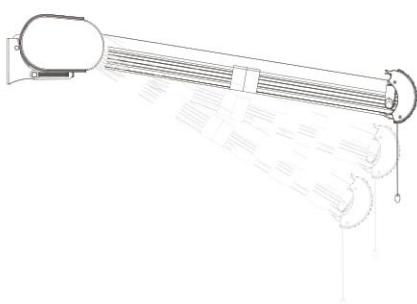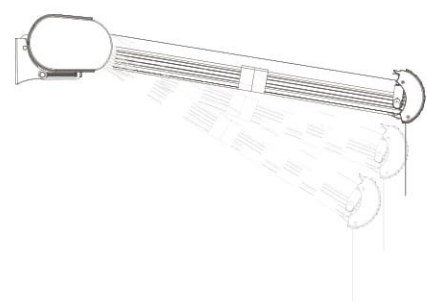

Wall Installation Bracket




Minimum Degree	5°	French Fringe Standard	250 mm
Maximum Degree	45°	French Fringe Maximum	500 mm



Minimum Degree	5°	Victoria Fringe Standard	250 mm
Maximum Degree	45°	Victoria Fringe Maximum	500 mm

Ceiling Installation Bracket



Somfy Wind Sensor



Somfy Wind and Sun Sensor



Somfy Rain Sensor



Rising Infrared Heater



Fabric Colour Swatch



Aluminium Powder Coating



Iron Parts



Aerosol Touch-up Spray Paint



Silicone



Packaging with Hardened Kraft, Round Cylinder



Packaging with Wooden Crate



Manufacturer of **Shading Systems**
for Outdoor Spaces

